

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/028991 A2

(51) International Patent Classification⁷: **F41B**
(21) International Application Number:
PCT/US2004/030350

(22) International Filing Date:
16 September 2004 (16.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/503,178 16 September 2003 (16.09.2003) US

(71) Applicant (for all designated States except US): NA-
TIONAL PAINTBALL SUPPLY, INC. [US/US]; 570
Mantua Boulevard, Sewell, NJ 08080 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): CAMPO, John, E.
[US/US]; 13 Hanover Drive, Medford, NJ 08055-8619
(US).


(74) Agent: BALLARINI, Robert, J.; Volpe and Koenig, P.C.,
United Plaza, Suite 1600, 30 South 17th Street, Philadel-
phia, PA 19103 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRONIC PAINTBALL MARKER

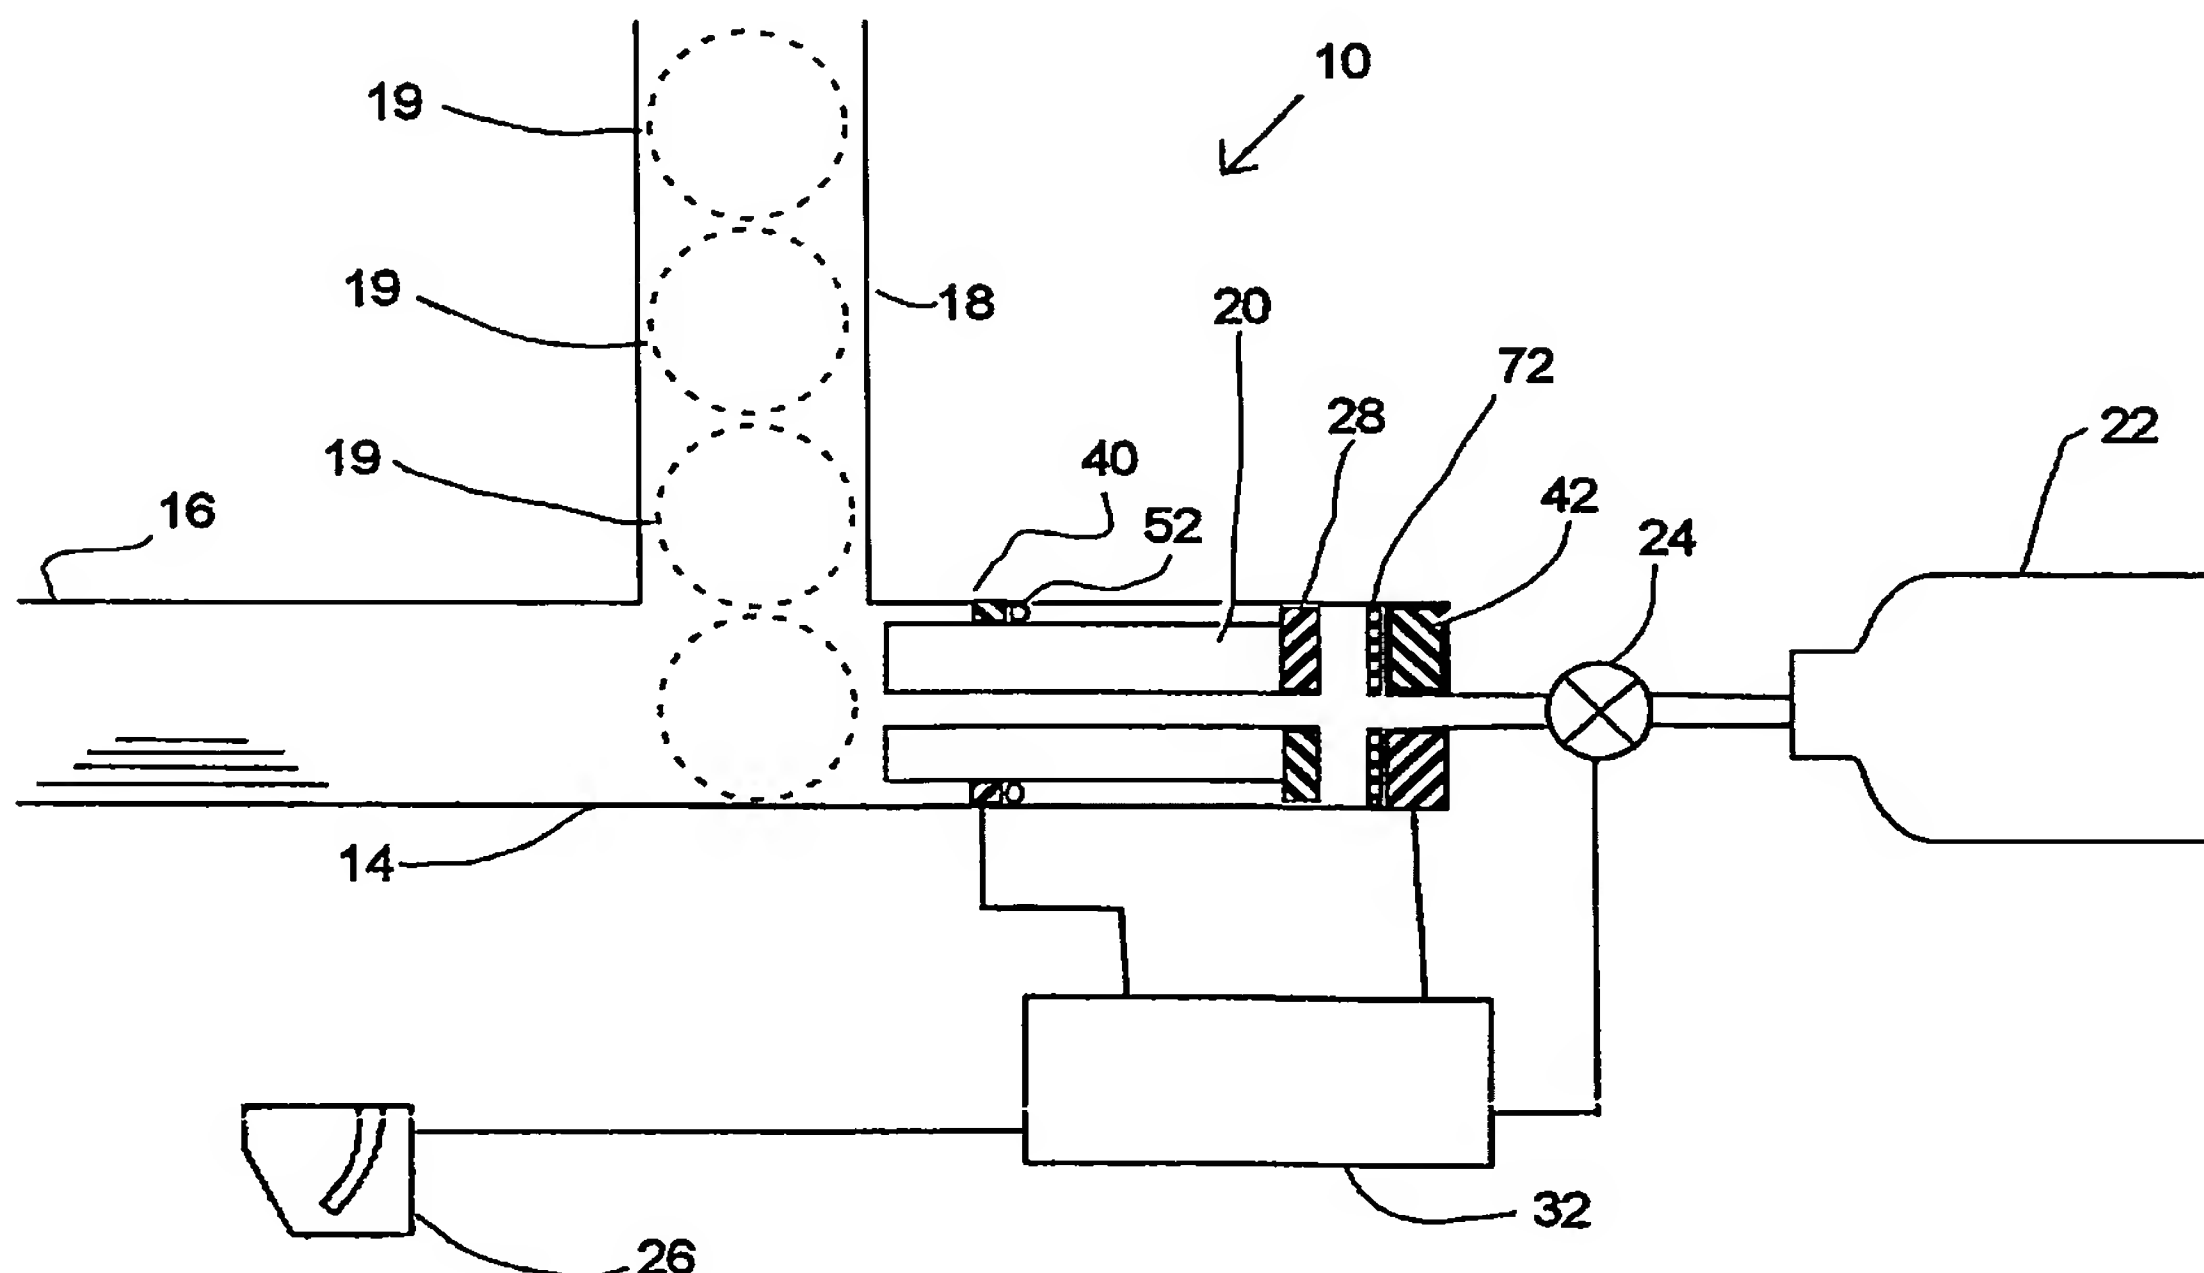

(57) Abstract: The present invention is directed to an electronically controlled paintball marker with magnetic control, having a trigger in communication with an electronic controller and a bolt configured to reciprocate in response to a magnetic force applied to a portion of the bolt during a firing sequence. Actuation of the trigger initiates a firing sequence activating electromagnets controlled by the electronic controller.



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.